

Selection Chart




ALBA

Tesla Series

Product Image	CCT - Color Temperature (k)			Colour Finish				
	2700			Frame		Reflector		
	3000 (S)			Black		Black		
	3500			White (W)		White (W)		
	4000 (S)					Silver		
	6000					Specular		
	Tunable White							
Geometry Image	Geometry			Selection Technical Parameters				
	Diameter [in mm]	Cutout [W] [in mm]	Height [H] [in mm]	Optics [°]	LED Wattage [W]	System Wattage [W]	Lumens [lm]	
	115	100	90	60[FL]	8 11	10 13	1300 1800	
	168	150	99	60[FL]	12 18 24	14 20 26	1900 2700 3500	
	220	200	116	60[FL]	26 30	28 33	3900 4600	
Specular Reflector	Silver Reflector		White Reflector		Black Reflector			
Driver Control Compatibility	Glare Diffusion Diagram		Standard Parameter					
Type			IP Rating	20		54		
Non Dimmable			Adjustability	Fixed				
Phase Dimming			Frame Type	Trim [T]				
1-10V Dimming			Input Parameter	230V - AC				
DALI Dimming			Output Parameter	Constant Current DC				

Selection Chart

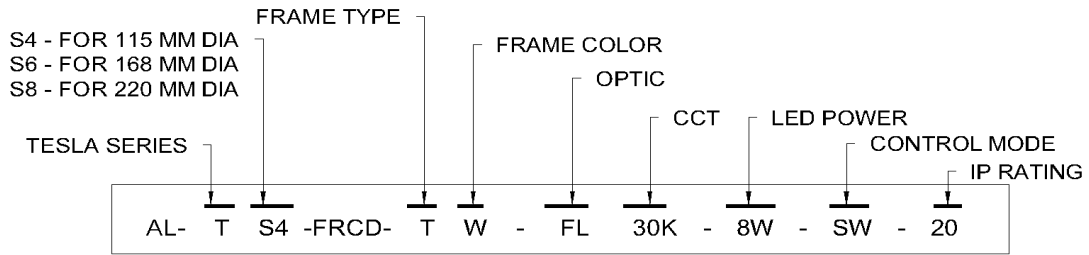

S - Standard