

LINK30 Series

LINEAR LIGHTING SYSTEM

Order options

SYSTEM POWER

54W

COLOUR TEMPERATURE

3000K
4000K

COLOR RENDERING INDEX

CRI 80
CRI 90

ILLUMINATION TYPE



direct




direct & indirect

PROFILE LENGTH

1590MM

PROFILE COLOUR





silver


white

black

INSTALLATION TYPE

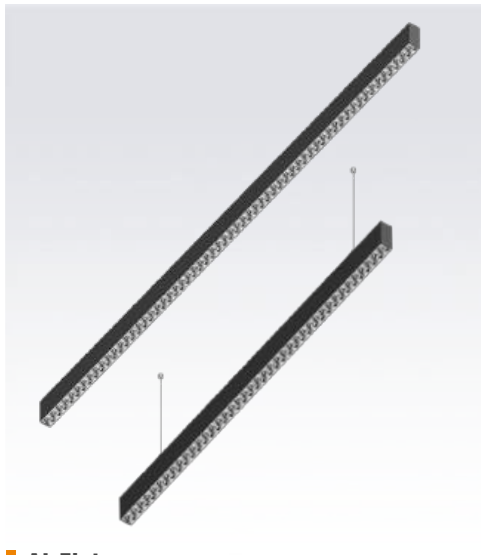

AL Fixture

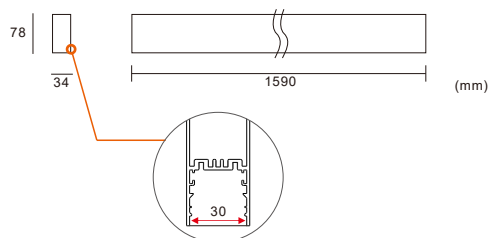

Light distribution

1590MM

Order Information

Link30-AL1590U-54W 5700-6000 Lm MODELS (SAMSUNG LED)

Code	LED output	Direct output	Indirect output	LED Power	System Power	CRI	CCT	BEAM
Link30-AL1590U-54W-830-15	6400 lm	4100 lm	1600 lm	48W	54W	80	3000K	15°
Link30-AL1590U-54W-840-15	6700 lm	4300 lm	1700 lm	48W	54W	80	4000K	15°
Link30-AL1590U-54W-830-35	6400 lm	4100 lm	1600 lm	48W	54W	80	3000K	35°
Link30-AL1590U-54W-840-35	6700 lm	4300 lm	1700 lm	48W	54W	80	4000K	35°
Link30-AL1590U-54W-830-60	6400 lm	4100 lm	1600 lm	48W	54W	80	3000K	60°
Link30-AL1590U-54W-840-60	6700 lm	4300 lm	1700 lm	48W	54W	80	4000K	60°