
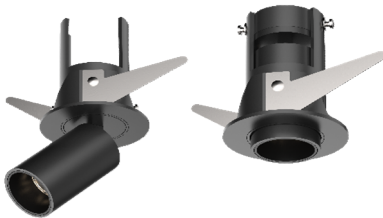




Selection Chart

ALBA

KIWI Series

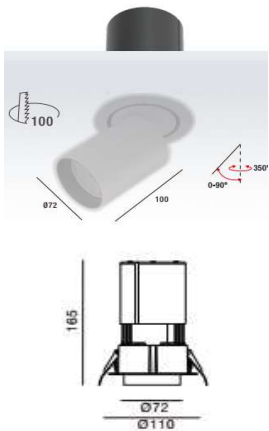

Product Image		CCT - Color Temperature (k)			Colour Finish				
		2700			Housing		Reflector		
		3000 (S)			Black		Black		
		3500			White (W)		White		
		4000 (S)					Gold		
		6000							
		Tunable White							
Geometry Image		Geometry			Selection Technical Parameters				
		Diameter [in mm]	Cutout [W] [in mm]	Height [H] [in mm]	Optics [°]	Wattage [W]	Lumens [lm]	LED Current [mA]	
		30	54	72	15[S] 30[NFL] 55[FL]	4	450	250	
		55	88	150	18[S] 24[NFL] 36[FL]	9	1050	350	
		72	110	165	15[S] 25[NFL] 30[FL]	13	1600	350	
		72	110	165	15[S] 25[NFL] 30[FL]	18	2100	500	
Driver Control Compatibility			Standard Parameter						
Type			IP Rating		20	44	54	60	
Non Dimmable			Adjustability		Fixed Housing with Adjustable Light module				
Phase Dimming			Frame Type		Trim [T] - Standard				
1-10V Dimming			Input Parameter		230V - AC				
DALI Dimming			Output Parameter		Constant Current DC				
30 - FOR 30 MM DIA 55 - FOR 55 MM DIA 70 - FOR 72 MM DIA KIWI SERIES FRAME TYPE FRAME COLOR OPTIC CCT LED POWER CONTROL MODE IP RATING AL- KI 30 - FRCD- T W - FL 30K - 4W - SW - 20									
S - Standard									

S - Standard