


ALBA

Strip Light - 1515 Series - 5W

Product Advantages

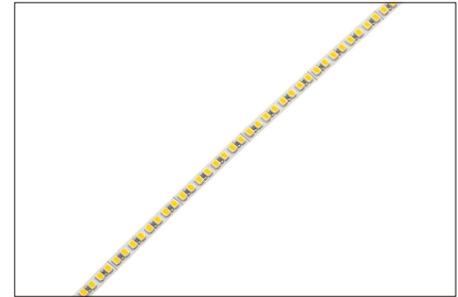

Basic Parameters


Surface Mounted LED Series

Power	5W
Voltage	DC-24V (DC-12V optional)
Current/m	0.21A@24V (0.42A@DC-12V)
PCB	3-OZ (35/70um) in 3mm width
Max. Run	5m@24V / (3m@12V)

Optical Parameters

CRI	CRI>95
Lumen	500 LM/meter
Efficiency	100 LM/watt
LED Type	300pcs 1515 SMD LEDs
LED Chip	San-An (Epistar optional)

Dimension



► DC-24V (Cutting anywhere)

Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
1515-300-5W-24V-W3-2.7K-**	2700K	5W/m	DC-24V	300-LEDs/m	>95	90 LM/watt	450LM/m
1515-300-5W-24V-W3-3K-**	3000K	5W/m	DC-24V	300-LEDs/m	>95	95 LM/watt	475LM/m
1515-300-5W-24V-W3-4K-**	4000K	5W/m	DC-24V	300-LEDs/m	>95	100 LM/watt	500LM/m
1515-300-5W-24V-W3-6K-**	6000K	5W/m	DC-24V	300-LEDs/m	>95	100 LM/watt	500LM/m

CCT / COLOR Solution



ERP Energy Efficiency Class



Waterproof Solution

