

ALBA

Strip Light - SCOB Series - 5W

Product Advantages



Basic Parameters

Power	5W/meter
Voltage	DC-24V (DC-12V optional)
Current/m	0.21A@24V (0.42A@DC-12V)
PCB	3-OZ (35/70um) in 3mm width
Viewing Angle	170°

Optical Parameters

CRI	CRI>90
Lumen	550 LM/meter
Efficiency	110 LM/watt
LED Type	320pcs 1515 SMD LEDs
LED Chip	San-An (Epistar optional)

Dimension

← 25,00 mm →




► DC-24V (Cutting Length: 25mm)

Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
-SCOB-320-5W-24V-W3-2K-**-**	2000K	5W/m	DC-24V	320LEDs/m	>90	90 LM/watt	450LM/m
SCOB-320-5W-24V-W3-2.7K-**-**	2700K	5W/m	DC-24V	320-LEDs/m	>90	100 LM/watt	500LM/m
SCOB-320-5W-24V-W3-3K-**-**	3000K	5W/m	DC-24V	320-LEDs/m	>90	110 LM/watt	550LM/m
SCOB-320-5W-24V-W3-4K-**-**	4000K	5W/m	DC-24V	320-LEDs/m	>90	115 LM/watt	575LM/m
SCOB-320-5W-24V-W3-6K-**-**	6000K	5W/m	DC-24V	320-LEDs/m	>90	115 LM/watt	575LM/m

CCT / COLOR Solution



Waterproof Solution

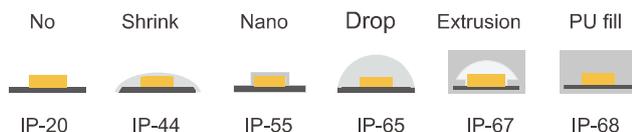

ERP Energy Efficiency Class

