

ALBA Strip Light - SCOB Series - 5W

Product Advantages



Free-cutting Series



Basic Parameters

Power	5W/meter
Voltage	DC-24V (DC-12V optional)
Current/m	0.21A@24V (0.42A@DC-12V)
PCB	3-OZ (35/70um) in 3mm width
Viewing Angle	170°

Optical Parameters

CRI	CRI>90
Lumen	400 LM/meter
Efficiency	80 LM/watt
LED Type	300pcs 1515 SMD LEDs
LED Chip	San-An (Epistar optional)

Dimension




Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
SCOB- 300 -5W-24V-W3-2K-**-	2000K	5W/m	DC-24V	300-LEDs/m	>90	70 LM/watt	350LM/m
SCOB- 300 -5W-24V-W3-2.7K-**-	2700K	5W/m	DC-24V	300-LEDs/m	>90	75 LM/watt	375LM/m
SCOB- 300 -5W-24V-W3-3K-**-	3000K	5W/m	DC-24V	300-LEDs/m	>90	80 LM/watt	400LM/m
SCOB- 300 -5W-24V-W3-4K-**-	4000K	5W/m	DC-24V	300-LEDs/m	>90	85 LM/watt	425LM/m
SCOB- 300 -5W-24V-W3-6K-**-	6000K	5W/m	DC-24V	300-LEDs/m	>90	85 LM/watt	425LM/m

CCT / COLOR Solution



Waterproof Solution

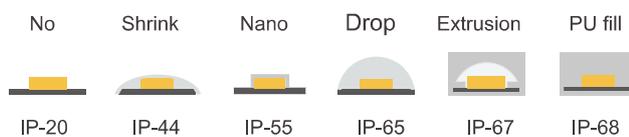

ERP Energy Efficiency Class

