

## Type AL-SM - FD7318



<b>Mounting</b>	Surface
<b>Lens (Cover)</b>	Diffused (80~70% light transmission) Clear (95~85% light transmission)
<b>Profile Colour</b>	Anodised Silver Anodised Black
<b>End Cap Colour</b>	White Grey

### Material

<b>Profile</b>	Aluminium Anodised Thickness: 10 $\mu$ m
<b>Cover</b>	Polycarbonate (fire rating: V2) UV Resistant
<b>End Caps</b>	Polycarbonate (fire rating: V2) UV Resistant
<b>Mounting Brackets</b>	Stainless Steel


### Accessories

<b>Mounting Clips</b>	6 each
<b>End Caps</b>	3 pairs (3x with cable entry, 3x blank)


### Dimensions

<b>Width (outer)(X)</b>	73 mm
<b>Height (outer)(Y)</b>	18 mm
<b>Flange Width (F)</b>	20 mm
<b>Flange Depth (FD)</b>	15 mm
<b>Length</b>	2 Mtrs
<b>Max LED tape width(Z)</b>	16 mm

### Lens Types

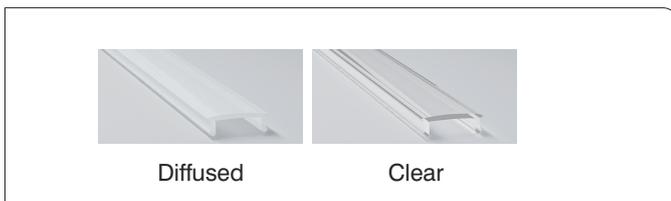

### End Cap



### Mounting Clip



### Profile Dimensions

