

## Type AL-SM - T 3628



<b>Mounting</b>	Surface
<b>Lens (Cover)</b>	Opal (40~30% light transmission) Diffused (80~70% light transmission) Clear (95~85% light transmission) Black
<b>Profile Colour</b>	Anodised Silver - stocked Anodised Black - stocked Painted White - Stocked Custom Powder Coating - optional*
<b>End Cap Colour</b>	White Grey - optional* Black Silver - optional*

### Material

<b>Profile</b>	Aluminium Anodised Thickness: 10µm
<b>Cover</b>	Polycarbonate (fire rating: V2) UV Resistant
<b>End Caps</b>	Polycarbonate (fire rating: V2) UV Resistant
<b>Mounting Brackets</b>	Stainless Steel



### Accessories

<b>Mounting Clips</b>	6 each
<b>End Caps</b>	3 pairs (3x with cable entry, 3x blank)

### Dimensions

<b>Width (outer)(X)</b>	36 mm
<b>Height (outer)(Y)</b>	28 mm
<b>Trim Width (T)</b>	6 mm
<b>Length</b>	1 Mtrs
<b>Max LED tape width(Z)</b>	16 mm

### Profile Dimensions

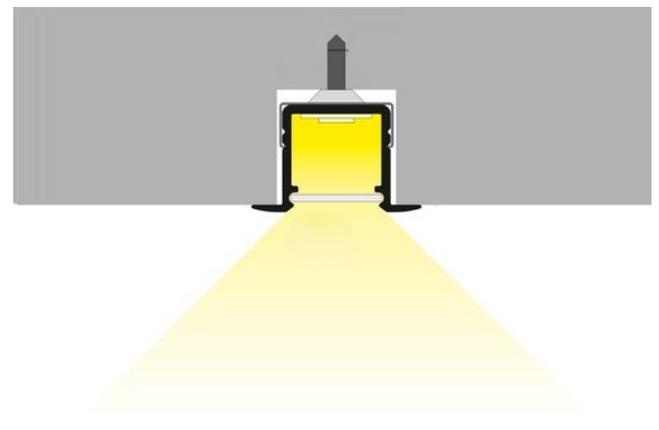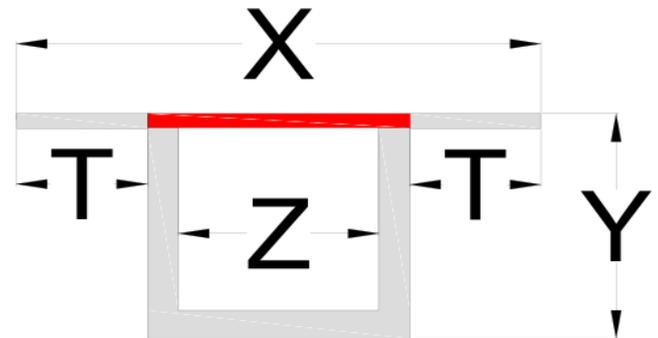

### Lens Types



### End Cap



### Mounting Clip

