

ALBALUCE

Strip Light - 2835 Series - 10W

Product Advantages

- ▶ SPI - Water running chasing
- ▶ Reinforced 2-OZ (=25/50um)
- ▶ Excellent Linear Lighting performance
- ▶ Always same BIN for different batches
- ▶ Comply with all kinds of waterproof solutions
- ▶ High CRI >90
- ▶ Max. 5m in series connection with power at one end



Basic Parameters


Surface Mounted LED Series

Power	10W/meter
Voltage	DC-24V
Current/m	0.42A@24V
PCB	2-OZ (25/50um) in 10mm width
Max. Run	5m@24V

Optical Parameters

CRI	CRI > 90
Lumen	1000 LM/meter
Efficiency	100 LM/watt
LEDs/M	120-LEDs/meter
LED Chip	San-An (Epistar optional)

Dimension

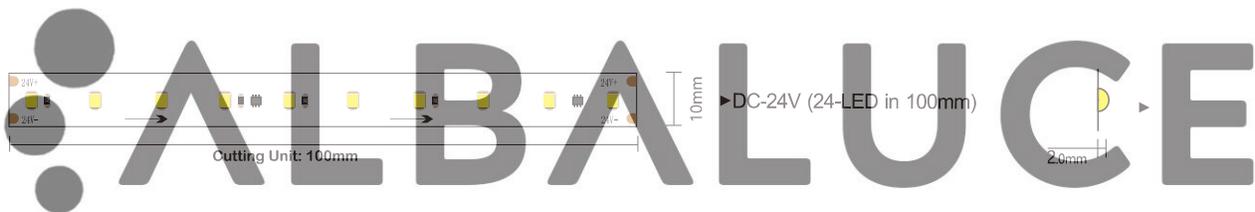


Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
2835-120-10W-24V-W10-2K-SPI	2000K	10W/m	DC-24V	120-LEDs/m	>90	95 LM/watt	950LM/m
2835-120-10W-24V-W10-2.7K-SPI	2700K	10W/m	DC-24V	120-LEDs/m	>90	100 LM/watt	1000LM/m
2835-120-10W-24V-W10-3K-SPI	3000K	10W/m	DC-24V	120-LEDs/m	>90	105 LM/watt	1050LM/m
2835-120-10W-24V-W10-4K-SPI	4000K	10W/m	DC-24V	120-LEDs/m	>90	110 LM/watt	1550LM/m
2835-120-10W-24V-W10-6K-SPI	6000K	10W/m	DC-24V	120-LEDs/m	>90	110 LM/watt	1100LM/m

CCT / COLOR Solution



Waterproof Solution

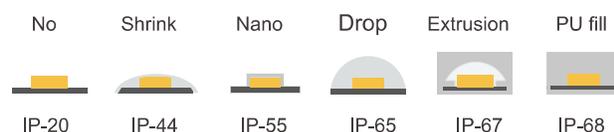

ERP Energy Efficiency Class

