

ALBALUCE

Strip Light - 2835 Series - 15W

Product Advantages



Basic Parameters


Surface Mounted LED Series

Power	14W/meter
Voltage	DC-24V / (DC-12V optional)
Current/m	0.58A@24V / 1.16A@12V
PCB	3-OZ (35/70um) in 10mm width
Max. Run	5m@24V (with strong aluminum profile)

Optical Parameters


CRI	CRI>80
Lumen	2000 LM/meter
Efficiency	160 LM/watt
LED Type	160pcs 2835 SMD LEDs
LED Chip	San-An (Epistar optional)

Dimension

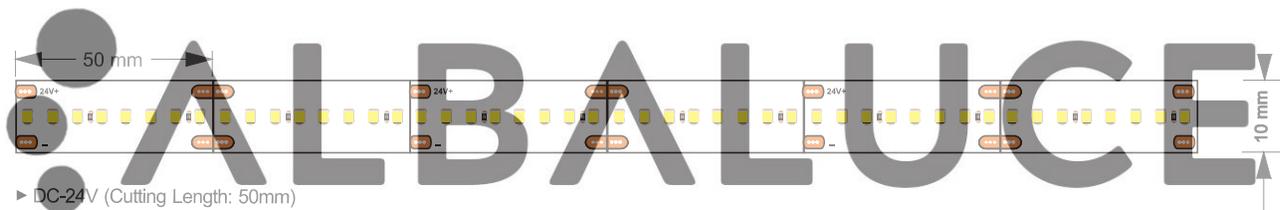


Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
2835-160-14W-24V-W10-2K-**	2000K	14W/m	DC-24V	160-LEDs/m	>80	140 LM/watt	3950LM/m
2835-160-14W-24V-W10-2.7K-**	2700K	14W/m	DC-24V	160-LEDs/m	>80	150 LM/watt	4080LM/m
2835-160-14W-24V-W10-3K-**	3000K	14W/m	DC-24V	160-LEDs/m	>80	155 LM/watt	4200LM/m
2835-160-14W-24V-W10-4K-**	4000K	14W/m	DC-24V	160-LEDs/m	>80	165 LM/watt	4300LM/m
2835-160-14W-24V-W10-6K-**	6000K	14W/m	DC-24V	160-LEDs/m	>80	165 LM/watt	4300LM/m

CCT / COLOR Solution

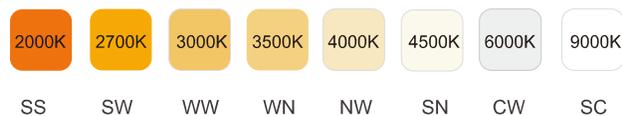

Waterproof Solution

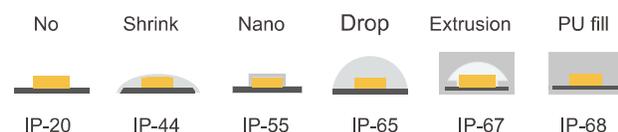

ERP Energy Efficiency Class

