

# ALBALUCE

## Strip Light - 2216 Series - 7W

### Product Advantages



#### Basic Parameters


##### Surface Mounted LED Series

Power	5W-7W/meter (Typical: 7W/meter)
Voltage	DC-24V (DC-12V optional)
Current/m	0.29A@24V (0.58A@DC-12V)
PCB	3-OZ (35/70um) in 4mm width
Max. Run	5m@24V / (3m@12V)

#### Optical Parameters

CRI	CRI>90
Lumen	1300 LM/meter
Efficiency	130 LM/watt
LED Type	160pcs 2216 SMD LEDs
LED Chip	San-An (Epistar optional)

#### Dimension

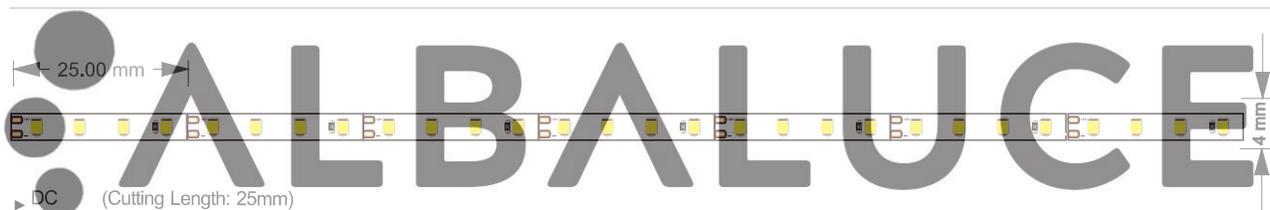


Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
2216-160H-7W-24V-W4-2.7K-**	2700K	7W/m	DC-24V	160-LEDs/m	>95	110 LM/watt	770LM/m
2216-160H-7W-24V-W4-3K-**	3000K	7W/m	DC-24V	160-LEDs/m	>95	115 LM/watt	800LM/m
2216-160H-7W-24V-W4-4K-**	4000K	7W/m	DC-24V	160-LEDs/m	>95	130 LM/watt	900LM/m
2216-160H-7W-24V-W4-6K-**	6000K	7W/m	DC-24V	160-LEDs/m	>95	130 LM/watt	900LM/m

#### CCT / COLOR Solution



#### Waterproof Solution

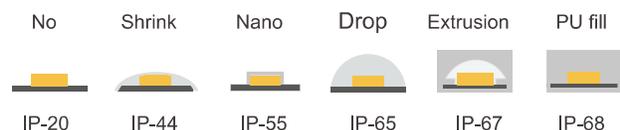

#### ERP Energy Efficiency Class

