

ALBALUCE

Strip Light - 2835 Series - 10W

Product Advantages



Basic Parameters


Surface Mounted LED Series

Power	10W/meter
Voltage	DC-24V
Current/m	0.41A@24V
PCB	3-OZ (35/70um) in 10mm width
Max. Run	3m@24V (with strong aluminum profile)

Optical Parameters

CRI	CRI>80
Lumen	2000 LM/meter
Efficiency	215 LM/watt
LED Type	180pcs 2835 SMD LEDs
LED Chip	San-An (Epistar optional)

Dimension

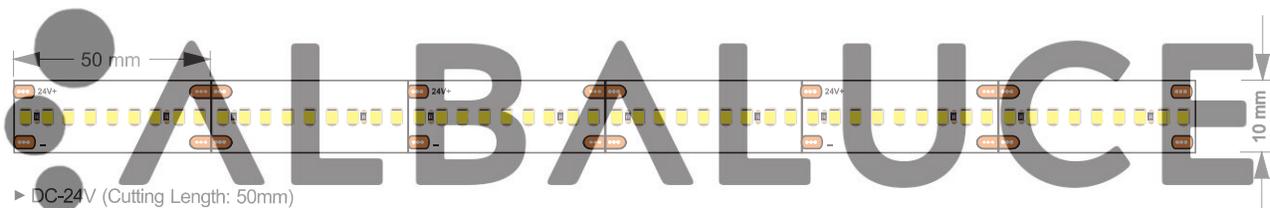


Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
2835-180H-10W-24V-W10-2K-**	2000K	10W/m	DC-24V	180-LEDs/m	>80	185 LM/watt	1850LM/m
2835-180H-10W-24V-W10-2.7K-**	2700K	10W/m	DC-24V	180-LEDs/m	>80	190 LM/watt	1900LM/m
2835-180H-10W-24V-W10-3K-**	3000K	10W/m	DC-24V	180-LEDs/m	>80	200 LM/watt	2000LM/m
2835-180H-10W-24V-W10-4K-**	4000K	10W/m	DC-24V	180-LEDs/m	>80	215 LM/watt	2150LM/m
2835-180H-10W-24V-W10-6K-**	6000K	10W/m	DC-24V	180-LEDs/m	>80	215 LM/watt	2150LM/m

CCT / COLOR Solution



Waterproof Solution

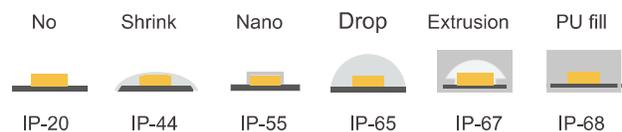

ERP Energy Efficiency Class

