


ALBALUCE

Strip Light - 2835 Series - 25W

Product Advantages

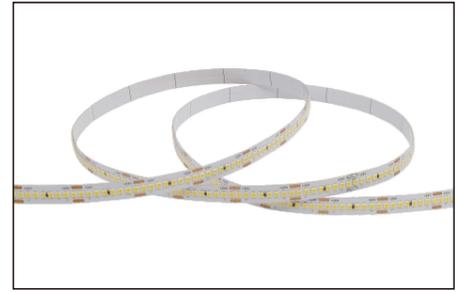

Basic Parameters


Surface Mounted LED Series

Power	19.2W-24W/meter (Max.: 24W/m)
Voltage	DC-24V
Current/m	1.00A@24V
PCB	3-OZ (35/70um) in 10mm width
Max. Run	3m@24V (with strong aluminum profile)

Optical Parameters

CRI	CRI>80
Lumen	4000 LM/meter
Efficiency	180 LM/watt
LED Type	240pcs 2835 SMD LEDs
LED Chip	San-An (Epistar optional)

Dimension

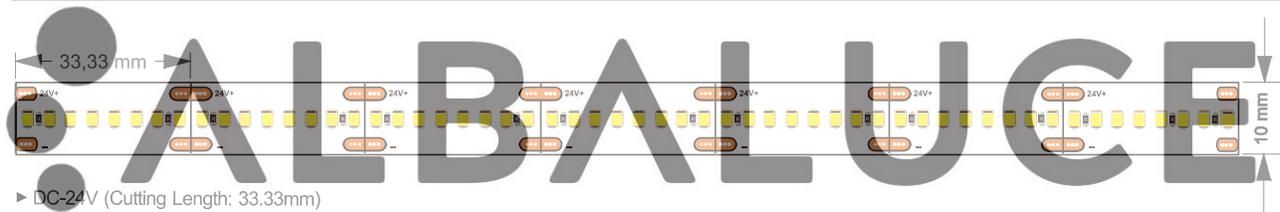


Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
2835-240H-24W-24V-W10-2K-**	2000K	24W/m	DC-24V	240-LEDs/m	>80	160 LM/watt	3950LM/m
2835-240H-24W-24V-W10-2.7K-**	2700K	24W/m	DC-24V	240-LEDs/m	>80	170 LM/watt	4080LM/m
2835-240H-24W-24V-W10-3K-**	3000K	24W/m	DC-24V	240-LEDs/m	>80	175 LM/watt	4200LM/m
2835-240H-24W-24V-W10-4K-**	4000K	24W/m	DC-24V	240-LEDs/m	>80	185 LM/watt	4300LM/m
2835-240H-24W-24V-W10-6K-**	6000K	24W/m	DC-24V	240-LEDs/m	>80	185 LM/watt	4300LM/m

CCT / COLOR Solution



Waterproof Solution

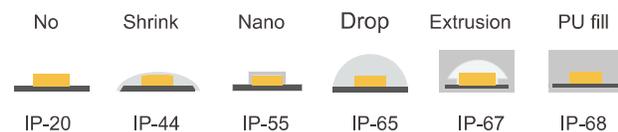

ERP Energy Efficiency Class

