


ALBALUCE

Strip Light - 2216 Series - 10W

Product Advantages

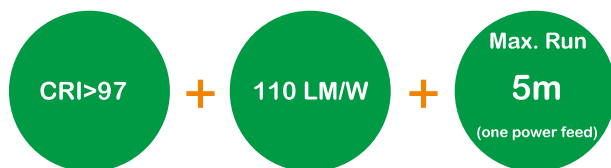

Basic Parameters


Surface Mounted LED Series

Power	10W-15W/meter (Typical: 10W/meter)
Voltage	DC-24V (DC-12V optional)
Current/m	0.42A@24V (0.83A@DC-12V)
PCB	3-OZ (35/70um) in 8mm width
Max. Run	5m@24V / (3m@12V)

Optical Parameters


CRI	CRI>97
Lumen	1100 LM/meter
Efficiency	110 LM/watt
LED Type	280pcs 2216 SMD LEDs
LED Chip	San-An (Epistar optional)

Dimension

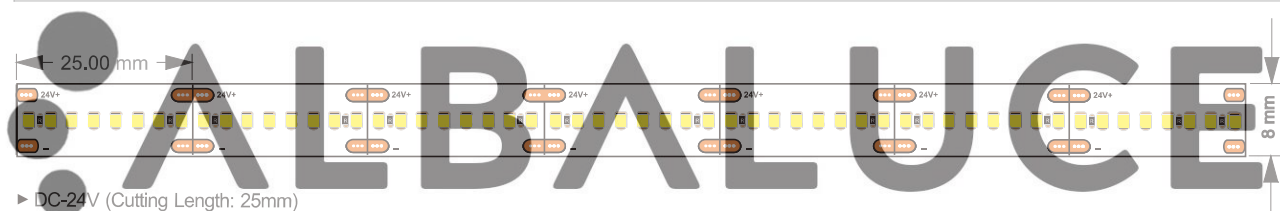


Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
2216-280H-10W-24V-W8-2.7K-**-	2700K	10W/m	DC-24V	280-LEDs/m	>97	100 LM/watt	1000LM/m
2216-280H-10W-24V-W8-3K-**-	3000K	10W/m	DC-24V	280-LEDs/m	>97	105 LM/watt	1050LM/m
2216-280H-10W-24V-W8-4K-**-	4000K	10W/m	DC-24V	280-LEDs/m	>97	110 LM/watt	1100LM/m
2216-280H-10W-24V-W8-6K-**-	6000K	10W/m	DC-24V	280-LEDs/m	>97	110 LM/watt	1100LM/m

CCT / COLOR Solution



Waterproof Solution

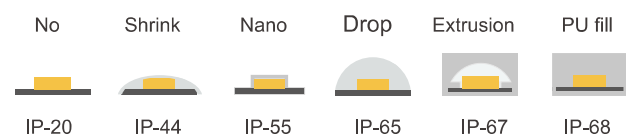

ERP Energy Efficiency Class

