

ALBALUCE

Strip Light - 2216 Series - 15W

Product Advantages



Basic Parameters


Surface Mounted LED Series

Power	10W-15W/meter (Typical: 15W/meter)
Voltage	DC-24V (DC-12V optional)
Current/m	0.62A@24V (1.25A@DC-12V)
PCB	3-OZ (35/70um) in 10mm width
Max. Run	15m@24V / (10m@12V)

Optical Parameters

CRI	CRI>90
Lumen	1950 LM/meter
Efficiency	130 LM/watt
LED Type	300pcs 2216 SMD LEDs
LED Chip	San-An (Epistar optional)

Dimension

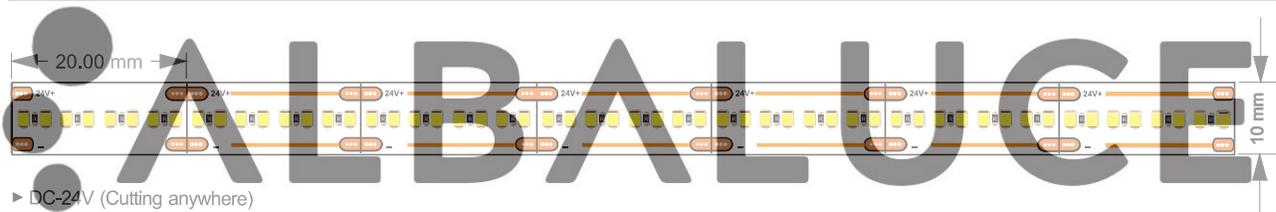


Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
2216-300F-15W-24V-W10-2K-**-**	2000K	15W/m	DC-24V	300-LEDs/m	>90	105 LM/watt	1600LM/m
2216-300F-15W-24V-W10-2.7K-**-**	2700K	15W/m	DC-24V	300-LEDs/m	>90	115 LM/watt	1730LM/m
2216-300F-15W-24V-W10-3K-**-**	3000K	15W/m	DC-24V	300-LEDs/m	>90	120 LM/watt	1800LM/m
2216-300F-15W-24V-W10-4K-**-**	4000K	15W/m	DC-24V	300-LEDs/m	>90	130 LM/watt	1950LM/m
2216-300F-15W-24V-W10-6K-**-**	6000K	15W/m	DC-24V	300-LEDs/m	>90	130 LM/watt	1950LM/m

CCT / COLOR Solution



Waterproof Solution

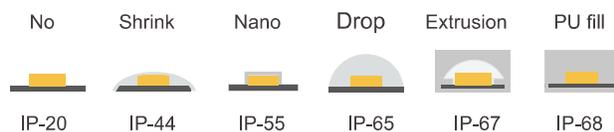

ERP Energy Efficiency Class

