

ALBALUCE Strip Light - 2216 Series - 7W

Product Advantages



Basic Parameters


Surface Mounted LED Series

Power	5W-7W/meter (Typical: 7W/meter)
Voltage	DC-24V (DC-12V optional)
Current/m	0.29A@24V (0.58A@DC-12V)
PCB	3-OZ (35/70um) in 5mm width
Max. Run	10m@24V / (5m@12V)

Optical Parameters

CRI	CRI>90
Lumen	1300 LM/meter
Efficiency	130 LM/watt
LED Type	300pcs 2216 SMD LEDs
LED Chip	San-An (Epistar optional)

Dimension

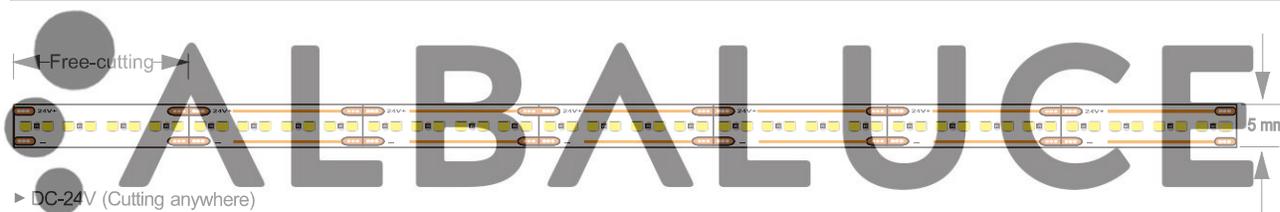


Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
2216-300F-7W-24V-W5-2K-**	2000K	7W/m	DC-24V	300-LEDs/m	>90	105 LM/watt	730LM/m
2216-300F-7W-24V-W5-2.7K-**	2700K	7W/m	DC-24V	300-LEDs/m	>90	115 LM/watt	800LM/m
2216-300F-7W-24V-W5-3K-**	3000K	7W/m	DC-24V	300-LEDs/m	>90	120 LM/watt	840LM/m
2216-300F-7W-24V-W5-4K-**	4000K	7W/m	DC-24V	300-LEDs/m	>90	130 LM/watt	900LM/m
2216-300F-7W-24V-W5-6K-**	6000K	7W/m	DC-24V	300-LEDs/m	>90	130 LM/watt	900LM/m

CCT / COLOR Solution



Waterproof Solution

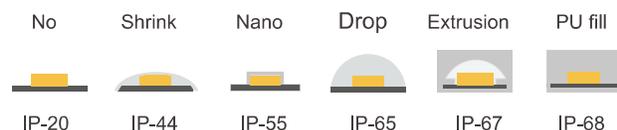

ERP Energy Efficiency Class

