

# ALBALUCE

## Strip Light - 2216 Series - 20W

### Product Advantages



### Basic Parameters


#### Surface Mounted LED Series

Power	15W-19.2W/meter (Max.: 19.2W/m)
Voltage	DC-24V ( DC-12V optional)
Current/m	0.80A@24V ( 1.6A@DC-12V)
PCB	3-OZ (35/70um) in 10mm width
Max. Run	5m@24V / (3m@12V)

### Optical Parameters

CRI	CRI>90
Lumen	3000 LM/meter
Efficiency	160 LM/watt
LED Type	320pcs 2216 SMD LEDs
LED Chip	San-An (Epistar optional)

### Dimension

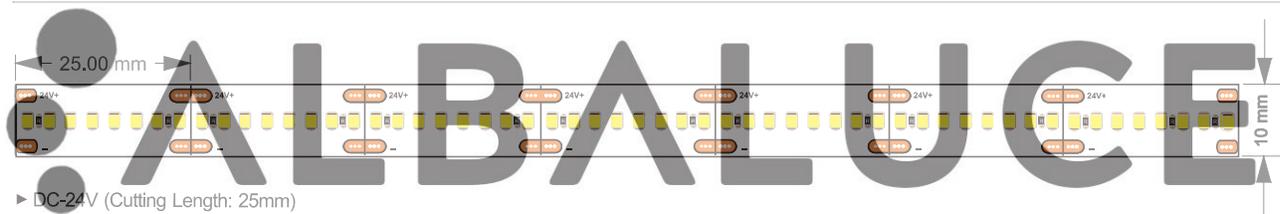


Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
2216-320H-19W-24V-W10-2K-**	2000K	19W/m	DC-24V	320-LEDs/m	>90	120 LM/watt	1550LM/m
2216-320H-19W-24V-W10-2.7K-**	2700K	19W/m	DC-24V	320-LEDs/m	>90	140 LM/watt	1700LM/m
2216-320H-19W-24V-W10-3K-**	3000K	19W/m	DC-24V	320-LEDs/m	>90	145 LM/watt	1800LM/m
2216-320H-19W-24V-W10-4K-**	4000K	19W/m	DC-24V	320-LEDs/m	>90	160 LM/watt	2000LM/m
2216-320H-19W-24V-W10-6K-**	6000K	19W/m	DC-24V	320-LEDs/m	>90	160 LM/watt	2100LM/m

### CCT / COLOR Solution



### Waterproof Solution

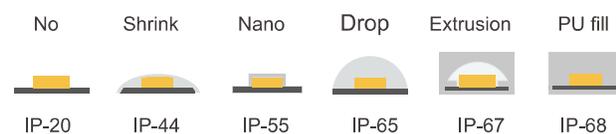

### ERP Energy Efficiency Class

