


ALBALUCE

Strip Light - COB Series - 10W

Product Advantages

Free-cutting Series

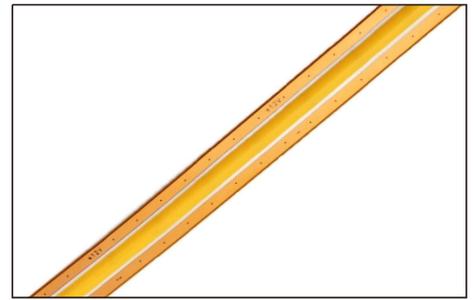


Basic Parameters

Power	10W/meter
Voltage	DC-24V (DC-12V optional)
Current/m	0.41A@24V (0.83A@DC-12V)
PCB	2-OZ (25/50um) in 8mm width
Viewing Angle	170°

Optical Parameters


CRI	CRI>90
Lumen	800 LM/meter
Efficiency	80 LM/watt
LEDs/M	528-LEDs/meter
LED Chip	San-An (Epistar optional)

Dimension

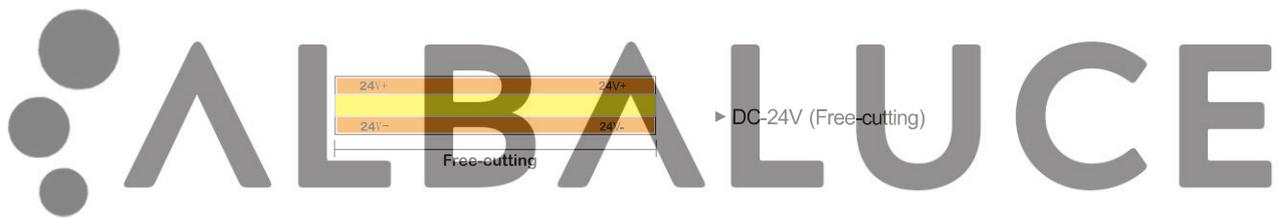


Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
COB-528-10W-24V-W8-2K-**-**	2000K	10W/m	DC-24V	528-LEDs/m	>90	70 LM/watt	700LM/m
COB-528-10W-24V-W8-2.7K-**-**	2700K	10W/m	DC-24V	528-LEDs/m	>90	75 LM/watt	750LM/m
COB-528-10W-24V-W8-3K-**-**	3000K	10W/m	DC-24V	528-LEDs/m	>90	80 LM/watt	800LM/m
COB-528-10W-24V-W8-4K-**-**	4000K	10W/m	DC-24V	528-LEDs/m	>90	85 LM/watt	850LM/m
COB-528-10W-24V-W8-6K-**-**	6000K	10W/m	DC-24V	528-LEDs/m	>90	85 LM/watt	850LM/m

CCT / COLOR Solution

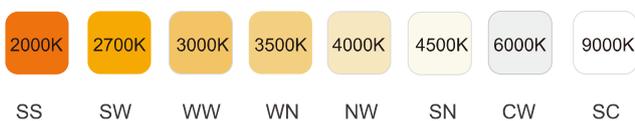

Waterproof Solution

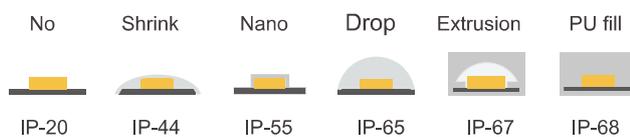

ERP Energy Efficiency Class

