


ALBALUCE

Strip Light - COB Series - 5W

Product Advantages

- ▶ 9X22mil LED Chips inside
- ▶ Flexible 3-OZ (=35/70um) PCBs
- ▶ Excellent Linear Lighting performance
- ▶ Always same BIN for different batches
- ▶ Comply with all kinds of waterproof solutions
- ▶ High CRI >90
- ▶ Max. 3m in series connection with power at one end

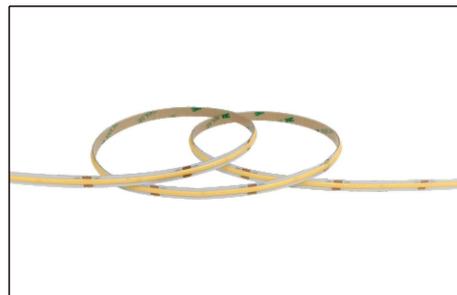


Basic Parameters

Power	7W/meter
Voltage	DC-24V (DC-12V optional)
Current/m	0.29A@24V (0.58A@DC-12V)
PCB	2-OZ (25/50um) in 5mm width
Viewing Angle	170°

Optical Parameters

CRI	CRI>90
Lumen	700 LM/meter
Efficiency	100 LM/watt
LEDs/M	400-LEDs/meter
LED Chip	San-An (Epistar optional)

Dimension

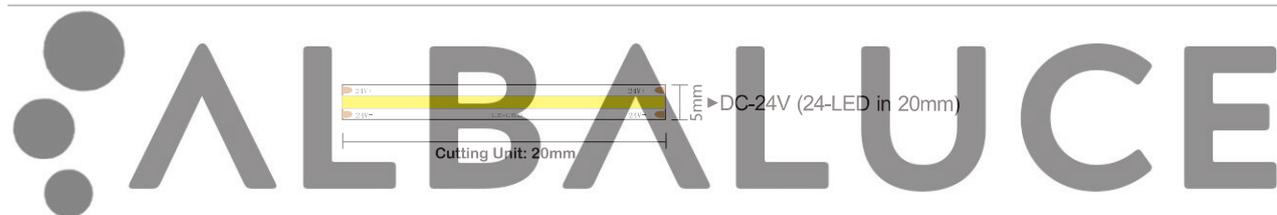


Part No.	CCT	Power	Voltage	LEDs/m	CRI	Efficiency	LM/meter
COB-400-7W-24V-W5-2K-**	2000K	7W/m	DC-24V	400-LEDs/m	>90	95 LM/watt	670LM/m
COB-400-7W-24V-W5-2.7K-**	2700K	7W/m	DC-24V	400-LEDs/m	>90	100 LM/watt	700LM/m
COB-400-7W-24V-W5-3K-**	3000K	7W/m	DC-24V	400-LEDs/m	>90	105 LM/watt	730LM/m
COB-400-7W-24V-W5-4K-**	4000K	7W/m	DC-24V	400-LEDs/m	>90	110 LM/watt	770LM/m
COB-400-7W-24V-W5-6K-**	6000K	7W/m	DC-24V	400-LEDs/m	>90	110 LM/watt	770LM/m

CCT / COLOR Solution



Waterproof Solution

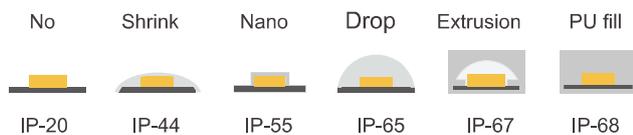

ERP Energy Efficiency Class

